


Engineered for performance



Memaplex™ advanced polymer
 created from an exclusive composition of the most sophisticated polyolefins and rubber additives, expertly blended for unequalled durability.

Varying lengths
 to fit any facility. The Short Swing Gate is available from 800mm to 1200mm in 100mm increments. The Long Swing Gate is available for larger openings up to 2000mm.

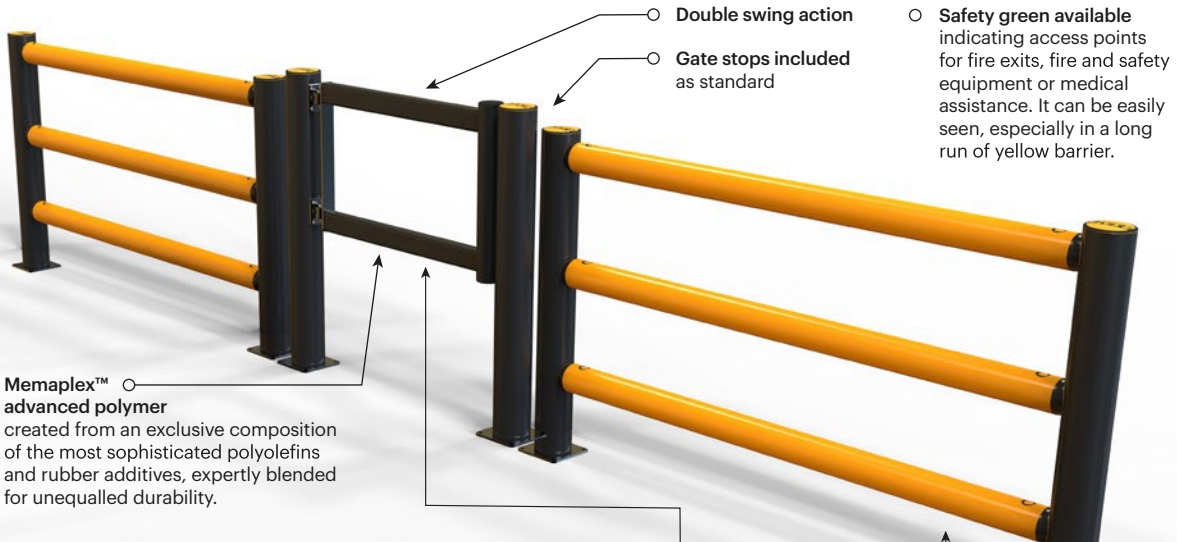

Ergonomic design with no sharp edges.


Twin-gate option allows the gate to be installed in pairs to provide a maximum opening of 2400mm for the Short Swing Gate and 4000mm for the Long Swing Gate.

Environmentally friendly and 100% recyclable.




Zinc nickel, electrophoretic coating on base plates as standard, provides advanced protection against corrosion damage.


ADDITIONAL BASE OPTIONS




Countersunk Bolts



Galvanised Steel



Stainless Steel 316 Standard



Stainless Steel 316 Countersunk

